


ECO MULTIBLE

1) Functions of the buttons;

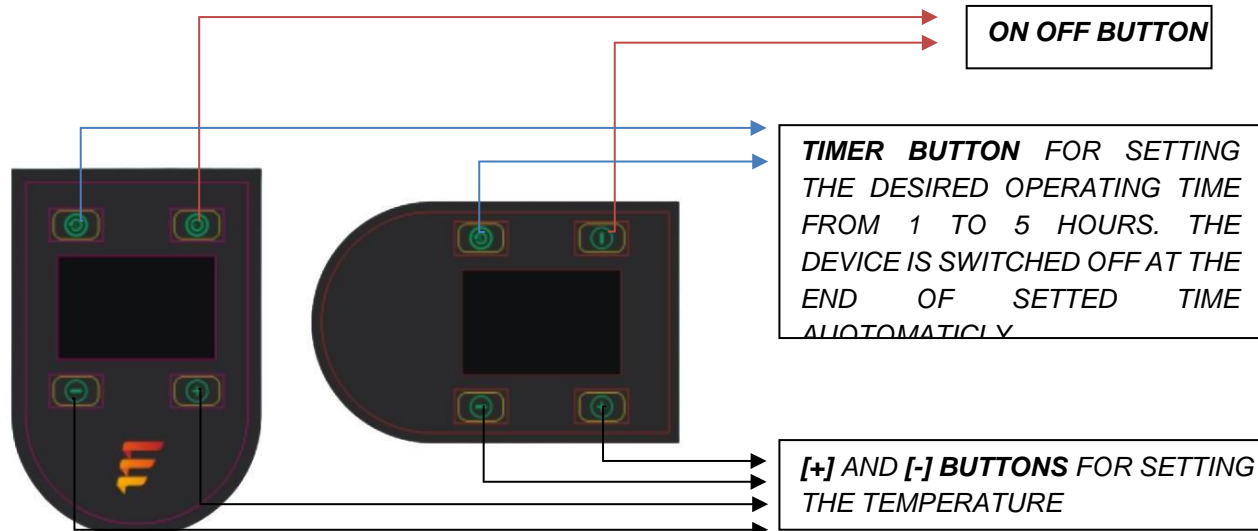

Functional Specifications

Heating on/off	
Desired temperature	Adjustable from +7°C to +35°C with visible comfort range
Safety	-Internal protection against overhating faults by thermofuse -Built-in temperature sensor protects the device from overheating, limiting the temperature of the radiator to maximum of 70°C.
Timer Function	Timer function enables to program the unit for 1 to 5 hours.
Two side mounting flexibility	Control unit can be placed both on the right and the left side of the towel rail . Display direction can be turned 180°.

Power supply

Operating Voltage	230V 50 Hz.
Maximum power	1000W, resistive load

Environment

Protection Rating	IP44
-------------------	------

Class	Class I & Class II
Desired temperature setting	Adjustable from +7°C to +35°C
Storage temperature	-10°C to +70°C

Applicable Standards

SAFETY EMC	EN 61000-4-2 :2009 EN 61000-4-3 :2006 + A1 + A2 EN 61000-4-4 :2012 EN 61000-4-5 : 2014 EN 61000-4-6 : 2014 EN 61000-4-11 2004 EN 61000-4-13 : 2002 + A1 + A2
LVD	EN 60335-1
RoHS	EN 50581